


## Wall Mounted Cabinets

**Prysmian Part Numbers: See below**

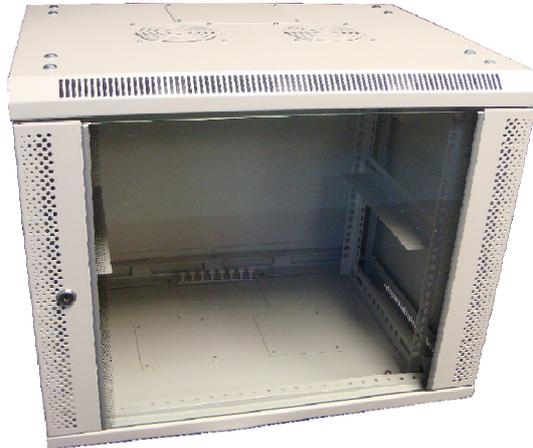

A range of strong and robust 19" Wall Mounted Cabinets. The cabinets are fully vented with a lockable steel framed glass door for safety and security. Quick release hinges allow for easy access to the cabinet for loading equipment and cables. Removable side panels allow access from each side and gland plate covers and cable strain relief positions are included in the top and bottom of the cabinets. The cabinets are available in a range of sizes from 6U up to 22U.

### Features and Benefits

- Cabinets are 600mm in width.
- A variety of different heights and depths are available. 6U, 9U, 12U, 15U, 18U and 22U cabinets are available in 450mm depth, and 9U, 15U and 18U cabinets are also available in 600mm depth.
- Can accommodate a range of 19" products including the Prysmian SRS3000 Splice Only, Patch Only, Splice and Patch and Storage shelves.
- Sliding 19" mounting rails front and rear.
- Standard ventilation top and bottom. Up to two fans can be fitted to top and bottom cover for cooling of active equipment. See additional items.
- Rear panel included.
- Simple one man installation. Supplied completely assembled.
- The door opens 180° right or left hinged.
- Supplied with a lockable door and lockable side panels using the same key.
- Heavy duty construction.

### Kit Contents

- Wall mounted cabinets are supplied with side panels left and right, a set of 19" mounting rails, cage nuts and a lockable glass door.

### Additional Items

- Ringed Cable Bars
- Blank Panels
- Brushed Panel
- Fan Kit.

### Part Numbers

Height	Part Number	
	Depth	
	450mm	600mm
6U	XCPSC00784	N/A
9U	XCPSC00785	XCPSC00790
12U	XCPSC00786	N/A
15U	XCPSC00787	XCPSC00791
18U	XCPSC00788	XCPSC00792
22U	XCPSC00789	N/A

## Technical Data

- Dimensions (mm):
  - 6U (w) 600 x (d) 450 x (h) 368
  - 9U (w) 600 x (d) 450 or 600 x (h) 501
  - 12U (w) 600 x (d) 450 x (h) 635
  - 15U (w) 600 x (d) 450 or 600 x (h) 767
  - 18U (w) 600 x (d) 450 or 600 x (h) 900
  - 22U (w) 600 x (d) 450 x (h) 1034
- Operating temperature: -20°C to + 50°C (5 to 95% RH)
- Material: Steel
- Finish: Painted Grey RAL 7035
- Sealing: IP20

## Logistics

- Packing Dimensions (mm):
  - 6U x 450 (w) 690 x (d) 540 x (h) 450
  - 9U x 450 (w) 690 x (d) 540 x (h) 580
  - 9U x 600 (w) 730 x (d) 730 x (h) 580
  - 12U x 450 (w) 690 x (d) 540 x (h) 715
  - 15U x 450 (w) 690 x (d) 540 x (h) 850
  - 15U x 600 (w) 730 x (d) 730 x (h) 850
  - 18U x 450 (w) 690 x (d) 540 x (h) 985
  - 18U x 600 (w) 730 x (d) 730 x (h) 985
  - 22U x 450 (w) 690 x (d) 540 x (h) 985
- Weight (Kg):
  - 6U x 450 20.5 packed, 19.5 net
  - 9U x 450 24.0 packed, 23.0 net
  - 9U x 600 28.5 packed, 27.5 net
  - 12U x 450 27.5 packed, 26.5 net
  - 15U x 450 31.0 packed, 30.0 net
  - 15U x 600 36.0 packed, 35.0 net
  - 18U x 450 34.5 packed, 33.5 net
  - 18U x 600 39.8 packed, 38.8 net
  - 22U x 450 39.3 packed, 38.3 net

## Additional Items

### Ringed Cable Bars


Ringed cable bars are 19" panels that allow cables to be passes from one side of the cabinet to the other side. They are available in a number of sizes.

**Prysmian Part Nos: -**

***XCPSC00798 – 1U 4 Ring Cable Bar***

***XCPSC00799 – 2U 4 Ring Cable Bar***

***XCPSC00800 – 1U 4 Ring Recessed Cable Bar***

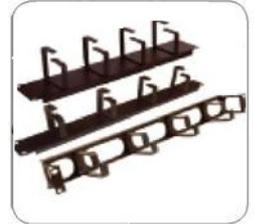

### Blank Panels

Blank panels are 19" panels that can be mounted in the cabinet to blank off any unused space. They help with airflow in cases where active equipment is used.

**Prysmian Part Nos: -**

***XCPSC00801 – 1U Blank Panel***

***XCPSC00802 – 2U Blank Panel***

***XCPSC00803 – 3U Blank Panel***



### Brushed Panel

The brushed panel is a 19" panel fitted with a brush, to enable patchcords to be routed from the front of the cabinet to the back of the cabinet. It helps with airflow in the cabinet in cases where active equipment is used.

**Prysmian Part Nos.: - XCPSC00804 – 1U Brush Strip**



### Fan Kit

Up to two fans can be fitted into the cabinet in the top or bottom cover. Each fan kit consists of one fan, one lead, one finger guard and four adhesive clips. Fan kits are used to provide cooling in cases where active equipment is used.

**Prysmian Part No. XCPSC00805 – Fan Kit**



Please contact your local sales office listed on [www.prysmiangroup.com](http://www.prysmiangroup.com)

© Prysmian Group 2012, All Rights Reserved.

The information contained within this document must not be copied, reprinted or reproduced in any form, either wholly or in part, without the written consent of Prysmian Group. The information is believed correct at the time of issue. Prysmian Group reserves the right to amend this specification without notice. This specification is not contractually valid unless specifically authorised by Prysmian Group.